




6 Conductor Solid CL2R Rated Thermostat Cable

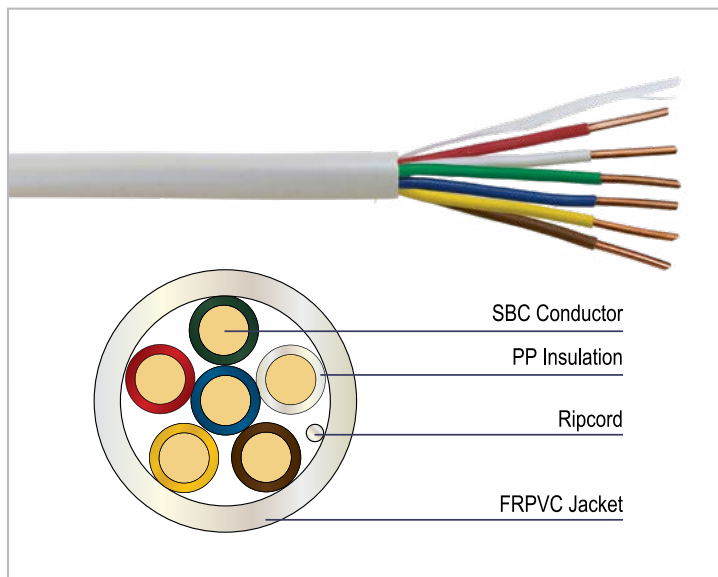

Applications

Vericom 6 conductor solid CL2R rated thermostat cable supports in-wall use and certain low-voltage applications. This cable is ideal for class 2 remote-control, signaling, and power-limited circuits and is suitable for in-wall installation in multi-story commercial building or residential environments.

Description / Specifications

This 6 conductor solid CL2R rated thermostat cable is offered in 18 AWG and is composed of 6 wires (Red, White, Green, Blue, Yellow, Brown) inside an In-Wall Riser rated jacket. This cable is approved for 150 volts and has a temperature range of -20°C to 60°C. Our thermostat cables are CMR and CL2R and meet UL 1685 Vertical Tray, which are perfect for commercial installation in vertical floor-to-floor runs, where the length exceeds one story.

Features & Benefits

- CL2R rated jacket for in-wall residential or commercial installations in vertical floor-to-floor runs, where the length exceeds one story
- UL Listed and RoHS compliant to ensure safety requirements are met
- Offered in 18 AWG solid copper conductor to suit your specific application
- Spool packaging to ease installation and storage

Standards Compliance

- UL 1685 Vertical Tray and UL 1666
- UL Standard 13, Power Limited Circuit Cable
- UL Listed Type CL2R and CMR
- NEC Article 725
- RoHS Compliant



6 Conductor Solid CL2R Rated Thermostat Cable

Ordering Information

Description				
Item No.	Conductor	Packaging	Cable Weight	Color
6 Conductor Solid Riser Rated Thermostat Cable				
HT186-02549	18 AWG	250 ft Spool	9 lb / 250 ft	White

VERICOM E364604 **XX** AWG 6C 60 °C (UL) TYPE CL2R ---
CMR SUNLIGHT RESISTANT

For accurate cable marking, replace the **XX** with the appropriate wire gauge.

Cable Marking

18 AWG Construction

Conductor Material: 18 AWG 5C Solid Bare Copper
Conductor Diameter: 0.040 in. (1.024 mm)
Insulation Material: Polypropylene (PP)
Insulation Thickness: 0.008 in. (0.203 mm)
Insulation Diameter: 0.057 in. (1.45 mm)
Insulation Color Code: Red, White, Green, Blue, Yellow, Brown

Ripcord: Nylon
Jacket Material: Sunlight Resistant Polyvinyl Chloride (SRPVC)
Jacket Thickness: 0.016 in. (0.41 mm)
Jacket Color: Specified By Item Number
Jacket Diameter: 0.197 in. (5.00 mm)

Electrical

Nominal Mutual Capacitance: 25 Pf/m
Nominal Conductor DC Resistance (DCR@20°C): 6.5 Ω/1000 ft

Voltage Rating: 150V

Environmental Conditions

Operating Temperature: -4 °F to 140 °F (-20 °C to 60 °C)