



PACKING

1 PC IN A ZIP BAG



CABLE MARKING

VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNP 70°C PLENUM CABLE 1.8mm OS1/OS2 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

P1		P2
1	_____	1
2	_____	2

***Note: All relevant materials are complied with RoHS directive.**

5	TRANSPARENT COIL CABLE TIE, LENGTH 40mm	1										
4	L/N WITH TRANSPARENT LABEL 20*20mm	1										
3	LC/UPC SM UNIBOOT / BLUE HOUSING / BOOT COLOR: WHITE STOPPER RED & BLACK / COMMUTATIVE POLARITY/ PUSH-PULL	2 SET										
2	SM, DX/ OFNP, G652D, 9/125, OD1.8*3.7mm, CORNING FIBER, JACKET YELLOW (PT123C).	L + 100MM										
1	LC/UPC SM/ 1.0	4										
No.	COMPONENT DESCRIPTION	Quantity										
APPROVED		<p>UNLESS OTHERWISE SPECIFIED: TOLERANCES</p> <table border="0"> <tr> <td>0 ~ 200 mm</td> <td>± 10 mm</td> </tr> <tr> <td>201 ~ 1000 mm</td> <td>± 20 mm</td> </tr> <tr> <td>1001 ~ 1500 mm</td> <td>± 25 mm</td> </tr> <tr> <td>1501 ~ 2100 mm</td> <td>± 30 mm</td> </tr> <tr> <td>2100 ↑</td> <td>± 40 mm</td> </tr> </table>	0 ~ 200 mm	± 10 mm	201 ~ 1000 mm	± 20 mm	1001 ~ 1500 mm	± 25 mm	1501 ~ 2100 mm	± 30 mm	2100 ↑	± 40 mm
0 ~ 200 mm	± 10 mm											
201 ~ 1000 mm	± 20 mm											
1001 ~ 1500 mm	± 25 mm											
1501 ~ 2100 mm	± 30 mm											
2100 ↑	± 40 mm											
CHECKED												
DRAWING	TITLE	OPTICAL FIBER CABLE										
DATE	03/11/24	ITEM NO. PP08U20218PYE**M										
	CHECKED	UNIT: mm										

POLARITY CONVERSION:




1. GRIP END OF CONNECTOR



2. PULL BOOT AWAY FROM CONNECTOR



3. OPEN THE COVER

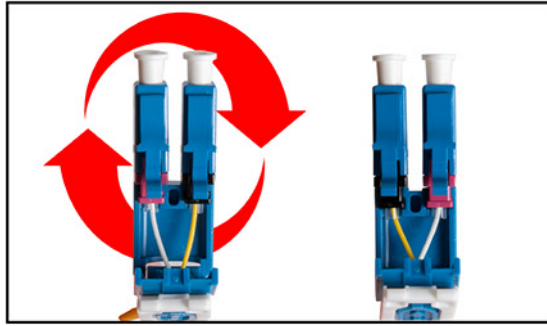

4. SWITCH POLARITY



5. CLOSE THE COVER



6. PUSH BOOT ON TO CONNECTOR



7. FINISH

Length (L)	Bag	Quantity
1M	150*240*0.08mm	400
2M	150*240*0.08mm	300
3M	150*240*0.08mm	250
5M	150*240*0.08mm	200
7M	150*240*0.08mm	140
10M	150*240*0.08mm	120
15M	170*290*0.08mm	70

TRANSMISSION PERFORMANCE

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-10 (FOCIS-10)

MECHANICAL

Connector Insertion Loss : 0.35dB max. (LC Singlemode)

Connector Return Loss : 55dB min. (OS1 / OS2)

Connector Durability : 500 Cycles


PHYSICAL

Storage and shipping temperature: -40°C to 70°C

Operating and installation temperature: -20°C to 70°C

NOTE:

All relevant materials are RoHS Compliant.

APPROVED			UNLESS OTHERWISE SPECIFIED: TOLERANCES		
CHECKED			0 ~ 200 mm	± 10 mm	
DRAWING		TITLE	OPTICAL FIBER CABLE	201 ~ 1000 mm	± 20 mm
DATE	03/11/24	ITEM NO.	PP08U20218PYE**M	1001 ~ 1500 mm	± 25 mm
				1501 ~ 2100 mm	± 30 mm
				2100 ↑	± 40 mm
				UNIT: mm	