



**PACKING**  
1 PC IN A ZIP BAG



**CABLE MARKING**


VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNP 70°C PLENUM CABLE 1.8mm OM4 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

|           |       |           |
|-----------|-------|-----------|
| <b>P1</b> |       | <b>P2</b> |
| <b>1</b>  | _____ | <b>1</b>  |
| <b>2</b>  | _____ | <b>2</b>  |

**\*Note: All relevant materials are complied with RoHS directive.**

|          |  |  |                     |
|----------|--|--|---------------------|
| 5        | TRANSPARENT COIL CABLE TIE, LENGTH 40mm  | 1  |                     |
| 4        | L/N WITH TRANSPARENT LABEL 20*20mm   | 1  |                     |
| 3        | LC/UPC MM UNIBOOT / AQUA HOUSING / BOOT COLOR: WHITE STOPPER RED & BLACK / COMMUTATIVE POLARITY/ PUSH-PULL | 2 SET  |                     |
| 2        | MM, DX/ OFNP, OM4, 50/125, OD1.8mm, CORNING FIBER, AQUA (PT3115C).   | L + 100MM  |                     |
| 1        | LC/UPC MM/ 4.0   | 4  |                     |
| No.      | COMPONENT DESCRIPTION  | Quantity   |                     |
| APPROVED |  | <b>UNLESS OTHERWISE SPECIFIED: TOLERANCES</b><br>0 ~ 200 mm ± 10 mm<br>201 ~ 1000 mm ± 20 mm<br>1001 ~ 1500 mm ± 25 mm<br>1501 ~ 2100 mm ± 30 mm<br>2100 ↑ ± 40 mm |                     |
| CHECKED  |  |  |                     |
| DRAWING  | TITLE  |  | OPTICAL FIBER CABLE |
| DATE     | 03/11/24   |  | ITEM NO.            |
|          |  | UNIT: mm   |                     |

**POLARITY CONVERSION:**

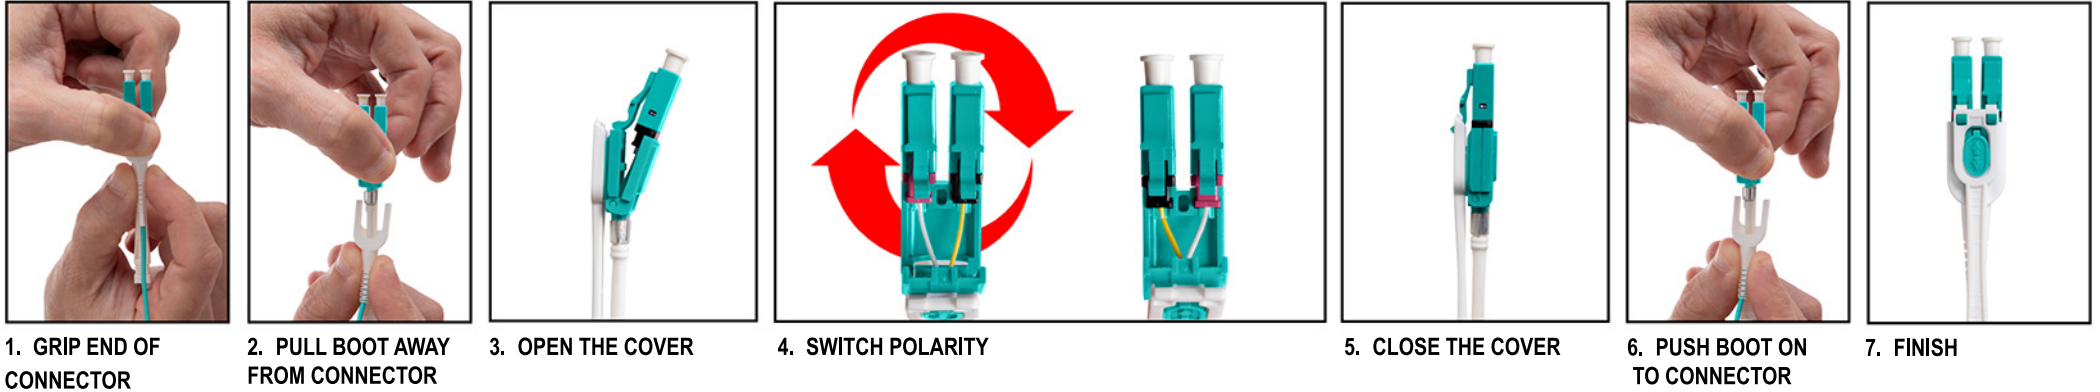

1. GRIP END OF CONNECTOR

2. PULL BOOT AWAY FROM CONNECTOR

3. OPEN THE COVER

4. SWITCH POLARITY

5. CLOSE THE COVER

6. PUSH BOOT ON TO CONNECTOR

7. FINISH

| Length (L) | Bag            | Quantity |
|------------|----------------|----------|
| 1M         | 150*240*0.08mm | 400      |
| 2M         | 150*240*0.08mm | 300      |
| 3M         | 150*240*0.08mm | 250      |
| 5M         | 150*240*0.08mm | 200      |
| 7M         | 150*240*0.08mm | 140      |
| 10M        | 150*240*0.08mm | 120      |
| 15M        | 170*290*0.08mm | 70       |

**TRANSMISSION PERFORMANCE**

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-10 (FOCIS-10)

**MECHANICAL**

Connector Insertion Loss : 0.35dB max. (LC Multimode)

Connector Return Loss : 35dB min. (OM4)

Connector Durability : 500 Cycles

**PHYSICAL**

Storage and shipping temperature: -40°C to 70°C

Operating and installation temperature: -20°C to 70°C

**NOTE:**

All relevant materials are RoHS Compliant.

|          |          |          |   |  |
|----------|----------|----------|---|--|
| APPROVED |          |          | UNLESS OTHERWISE SPECIFIED:<br>TOLERANCES |  |
| CHECKED  |          |          |   |  |
| DRAWING  |          | TITLE    | OPTICAL FIBER CABLE                       |  |
| DATE     | 03/11/24 | ITEM NO. | PP08U40218PAQ**M                          |  |
|          |          |          | UNIT: mm                                  |  |