





12-24 Tapped Rails for High Density Wall Cabinet

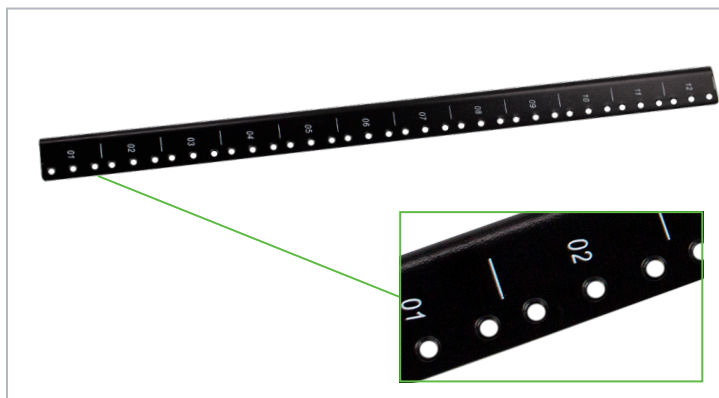

Description

These 12-24 tapped rails can be installed in the back of a High Density Wall Cabinet for installations of extra heavy equipment that requires front and rear mounting. Available in 12U, 15U, 18U and 25U these rails feature EIA compliant 1.75" hole spacing with RU spaces marked and numbered.

Technical Illustration

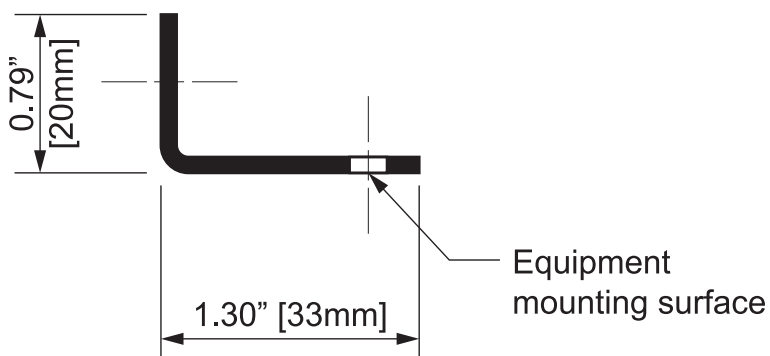

Product Specifications

Product Type: 12-24 Tapped Rails For High Density Wall Cabinet

Material: Cold Rolled Steel

Finish: Black Powder Coated

Dimensions (HxWxD): Varies By Item #

Rack Unit Quantity: 12U, 15U, 18U or 25U

Compatibility: Compatible with 12-24 Phillips Head Mounting Screws & Washers.

Compliance & Standards: EIA Compliant

Quantity Per Package: Set of 2

Ordering Information

Description		
12-24 Tapped Rails For High Density Wall Mount Cabinet		
Item #	Rack Units	Dims (H x W x D)
RARWT12	12U	21.00" X 1.25" X 0.69"
RARWT15	15U	26.25" X 1.25" X 0.69"
RARWT18	18U	31.50" X 1.25" X 0.69"
RARWT25	25U	43.75" X 1.25" X 0.69"