


2" Deep Basket Tray

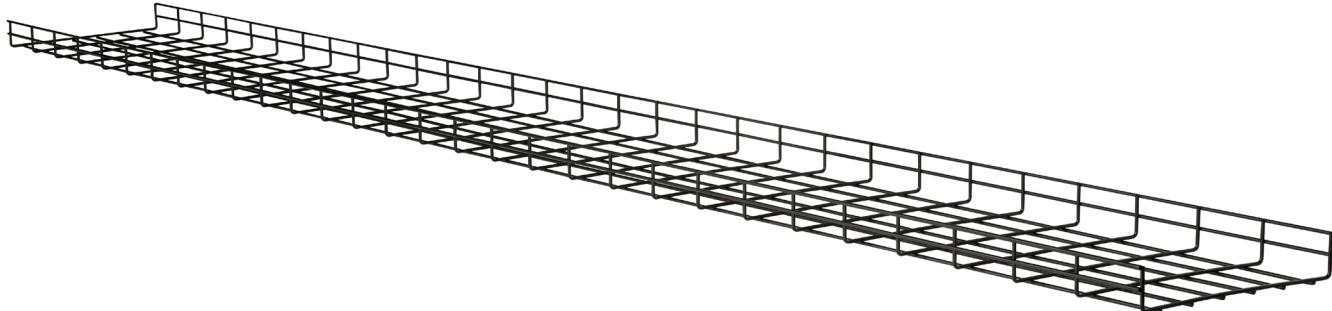

Description

VBT Series wire basket trays provide a durable yet adaptable pathway for routing cables along a wall, floor, or ceiling in a variety of applications, from short runs in a data closet to high-density data center installations. Each tray is constructed of welded high-strength carbon steel wire with stringers spaced every 2" and cross bars every 4", providing a rigid structure that can handle large cable bundles. And with surface finish options that include powder coating and electrogalvanized zinc plating, Vericom wire basket trays are corrosion resistant and will protect both cabling and installers from cuts, scratches, and frays. Each tray section is 118" long but can be cut to any required length.

Product Specifications

Material: High-strength carbon wire (0.197" [5mm] dia.)


Finish: See table below

Dimensions (L x H): 118.1" x 2.36" (see table below for available widths)

Weight: See table below

Compliance & Standards: IEC 61537

Selling Unit: 1 piece

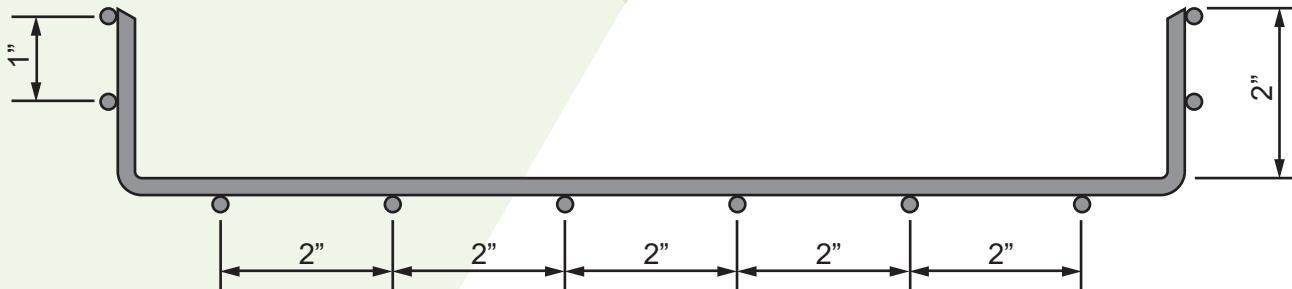

2" Deep Basket Tray

ITEM NUMBER	WIDTH		WT PER PC		LOAD (lbs/ft)*		CABLE FILL**		SPLICE QTY	AVAILABILITY	SECTION VIEW
	in	mm	lbs	kgs	5 ft span	6.5 ft span	CAT6***	CAT6A***			
VBT-ST05050-BP	2	50	6.70	3.04	n/a	n/a	49	35	2	Special order	
VBT-ST05100-BP	4	100	8.25	3.74	18.14	14.78	98	71	3	Special order	
VBT-ST05100-EG	4	100	8.25	3.74	18.14	14.78	98	71	3	Stocked	
VBT-ST05150-BP	6	150	9.81	4.45	36.29	28.22	148	106	3	Special order	
VBT-ST05200-BP	8	200	11.38	5.16	55.1	38.3	197	142	3	Special order	
VBT-ST05300-BP	12	300	14.44	6.55	55.1	40.99	295	212	4	Stocked	
VBT-ST05300-EG	12	300	14.44	6.55	55.1	40.99	295	212	4	Stocked	
VBT-ST05400-BP	16	400	17.53	7.95	66.52	45.02	393	283	4	Special Order	
VBT-ST05450-BP	18	450	19.07	8.65	66.52	47.38	442	318	4	Stocked	
VBT-ST05500-BP	20	500	20.61	9.35	66.52	49.73	492	354	4	Special order	
VBT-ST05600-BP	24	600	23.70	10.75	68.54	47.04	590	425	4	Special order	

BP = black powder coat finish

EG = electrogalvanized zinc finish

*Load calculations based on IEC 61537-2007 standards for cable tray systems testing.

**Cable Fill capacity based on NEC allowable fill of 50%.

***CAT6 rate based on 0.224" diameter; CAT6A rate based on 0.264" diameter. Actual diameters vary by cable manufacturer.

