


6" Deep Basket Tray

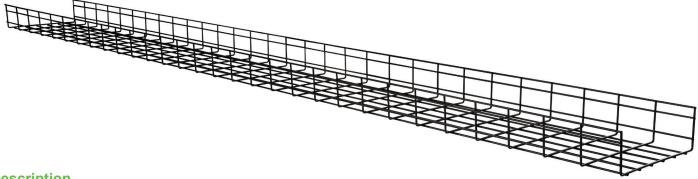

Description

VBT Series wire basket trays provide a durable yet adaptable pathway for routing cables along a wall, floor, or ceiling in a variety of applications, from short runs in a data closet to high-density data center installations. Each tray is constructed of welded high-strength carbon steel wire with stringers spaced every 2" and cross bars every 4", providing a rigid structure that can handle large cable bundles. And with a black powder coated finish, Vericom wire basket trays will protect both cabling and installers from cuts, scratches, and frays. Each tray section is 118" long but can be cut to any required length.

Product Specifications

Material: High-strength carbon wire (0.197" [5mm] dia.)

Finish: Black powder coat


Dimensions (L x H): 118.1" x 6.3" (see table below

for available widths)

Weight: see table below

Compliance & Standards: IEC 61537

Selling Unit: 1 piece

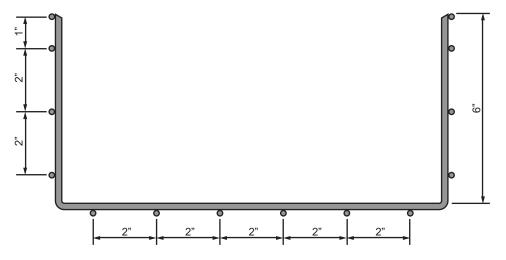

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20250212.1



6" Deep Basket Tray

ITEM NUMBER	WIDTH		WT PER PC		LOAD (lbs/ft)*		CABLE FILL**		SPLICE		
	in	mm	lbs	kgs	5 ft span	6.5 ft span	CAT6***	CAT6A***	QTY	AVAILABILITY	SECTION VIEW
VBT-ST15300-BP	12	300	20.61	9.35	78.82	58.73	885	637	4	Special order	
VBT-ST15400-BP	16	400	23.70	10.75	95.82	64.92	1180	849	4	Special order	
VBT-ST15500-BP	20	500	26.79	12.15	95.82	71.09	1475	1062	4	Special order	
VBT-ST15600-BP	24	600	29.87	13.55	98.91	61.82	1770	1274	4	Special order	





TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20250212.1

^{*}Load calculations based on IEC 61537-2007 standards for cable tray systems testing.

**Cable Fill capacity based on NEC allowable fill of 50%.

***CAT6 rate based on 0.224* diameter; CAT6A rate based on 0.264* diameter. Actual diameters vary by cable manufacturer.