

Cable Ladder Rack



Description

This cable ladder rack is used to support horizontal cable runs, and is available in 10 foot or 5 foot lengths to suit your specific requirements. Our 12" wide cable ladder rack consists of (2)1-1/2 x 3/8 x 0.060 thick steel tubular stringers with (13) $1.00 \times 1/2$ cross members welded on 9.00 centers. This cable ladder rack offers a maximum load with minimum deflection of 132 lbs. per foot if supported every 5 ft.

Product Specifications

Product Type: Cable Ladder Rack

Product Material (Stringers): 1-1/2 x 3/8 x 0.06 Thick

Tubular Steel

Product Material (Cross Members): 1.00 x 1/2 Thick

Tubular Steel Welded on 9.00 Centers

Compliance & Standards: RoHS Compliant


Max. Load W/ Min. Deflection: 132 lbs. Per Foot If

Supported Every 5 Feet

Ordering Information

Description	
12 Inch Wide Ladder Rack For Cable Runway	
Item #	Length
VLR-1210	10 foot
VLR-1205	5 foot

Technical Illustration

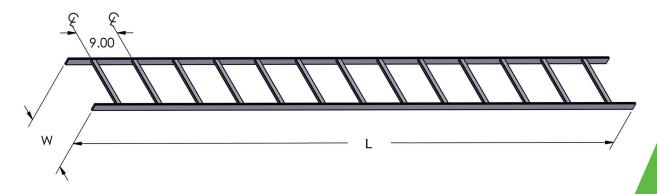

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20211013.4