


Copyright 2020 -

RoHS Compliant

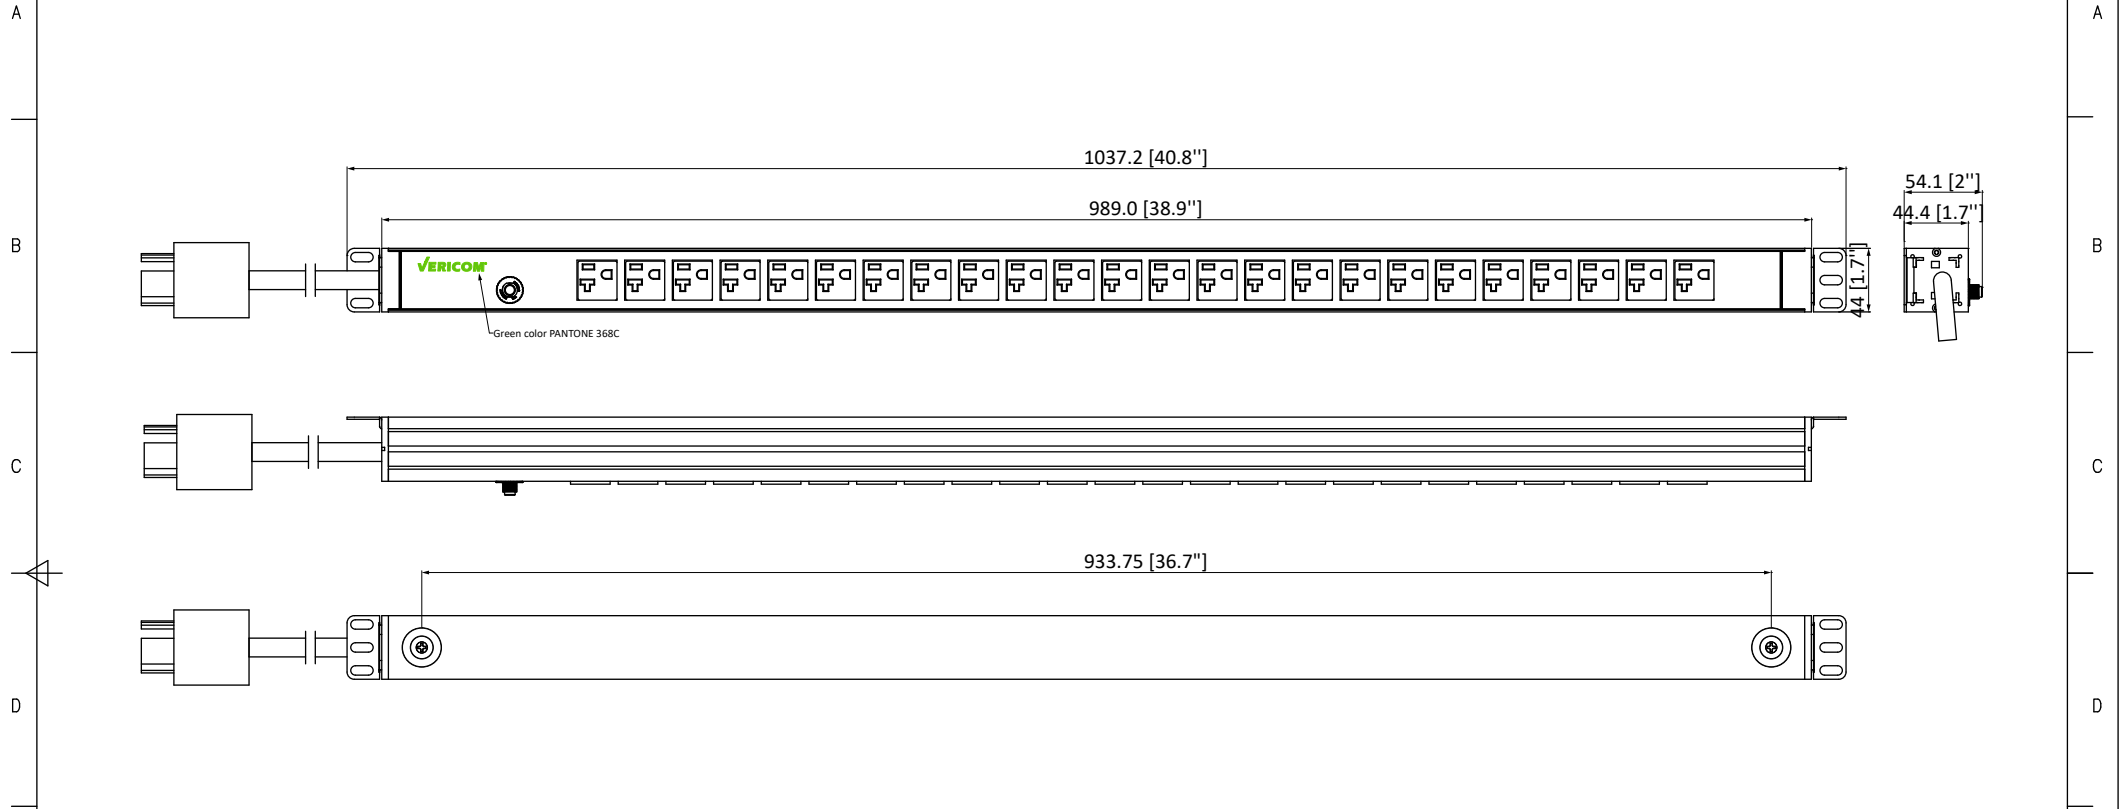

<b>Basic Series</b>	<b>OUTPUT</b> (24) NEMA 5-20R (120V 20A)	<b>OPERATING TEMPERATURE</b> 0° to 60°C
<b>INPUT</b> 100-120VAC 20A 50HZ NEMAL5-20P Twistlock 3.1m 12/3AWG Power lead	<b>BRANCH CIRCUITS</b> (1) 20A Overload	<b>MOUNTING ACCESORIES</b> (2) 42 Bracket in Zinc Black (2) Button fixed on the chassis

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION NO CHANGING)		VPB-L522420V	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Black Anodize
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
DATE 13-07-2020			