

VERICOM®



**Basic Rack Mount PDU - 20A, 200-240V,
3.3/4.9kW w/IEC C13 & C19**




Description

Vericom Basic Rack Mount PDUs distribute reliable power to IT equipment in a wide variety of applications where intelligence and/or remote monitoring are not required.

VPB-L621239H features (10) IEC C13 and (2) IEC C19 outlets protected by a single 20A circuit breaker, a reset button in the event of an overload, and a durable anodized aluminum chassis. A 10 ft power cord with a NEMA L6-20P twistlock plug connects to an external power supply, while the versatile mounting design allows outlets to face any of four directions.

Product Features

- 10 C13 and 2 C19 outlets
- Single 20A circuit breaker w/reset button
- Switchless design prevents accidental shutdowns
- Includes toolless 19" EIA mounting brackets that allow outlets to face the front, back, top, or bottom
- Conforms to UL 60950-1 and is RoHS compliant

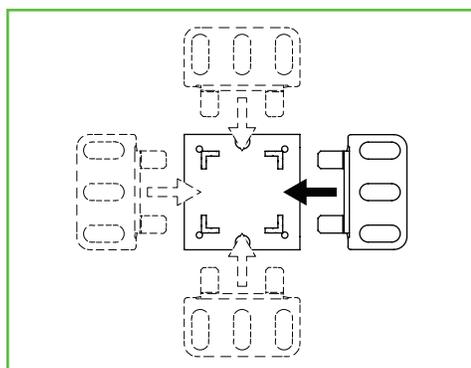



Basic Rack Mount PDU - 20A, 200-240V, 3.3/4.9kW w/IEC C13 & C19

OVERVIEW	
Item Number	VPB-L621239H
PDU Type	Basic
Form Factor	Horizontal (1U)
UPC Code	846788117307
OUTPUT	
Rated Output Voltage	208V Single Phase
Output Receptacles	(10) IEC C13 + (2) IEC C19
Overload Protection	(1) 20A Circuit Breaker
INPUT	
Rated Input Voltage	200-240V Single Phase
Max. Input Current	20A
Frequency	50/60 Hz
Power Capacity	3.3 -4.9 kW
Plug Type	NEMA L6-20P Twistlock
Cord Type	12/3 AWG
Cord Length	10 ft (3.05 meters)
PHYSICAL	
Unit Width	17.1 inches (435.6mm)
Unit Height	1.7 inches (44.0mm)
Unit Depth	1.7 inches (44.0mm)
Unit Weight	3.8 lbs (1.7 kgs)
Shipping Length	20.4 inches (518.2mm)
Shipping Width	8.5 inches (215.9mm)
Shipping Height	2.9 inches (73.66mm)
Shipping Weight	4.3 lbs (2.0 kgs)
Chassis Material	Anodized Aluminum (black)
Mounting Options	Toolless 19 inch EIA 4-way mounting brackets
ENVIRONMENTAL	
Operating Temperature	30° to 140° F (0° to 60° C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0 - 13,123 ft (4,000 meters)
SPECIAL FEATURES	
Breaker Reset	Push button on front
COMPLIANCE	
Certifications	Tested to conform to UL 60950-1; IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013: CB Scheme RoHS
Warranty	2-year limited warranty